
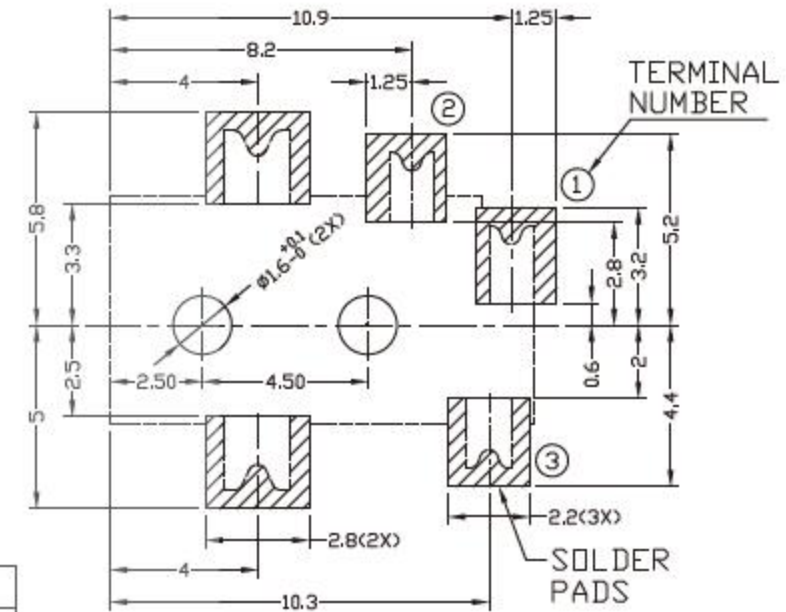

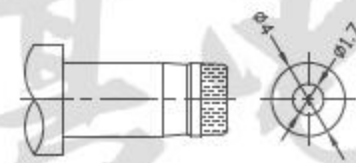

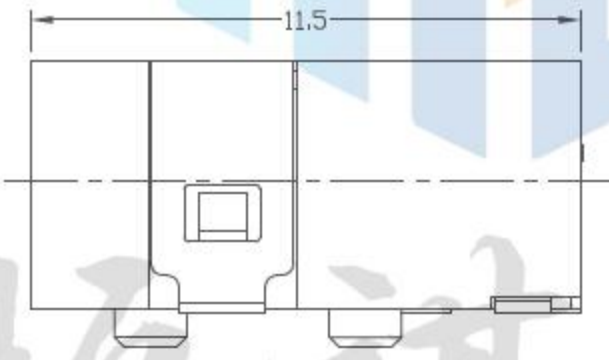


MODEL NO.	G
CENTER PIN	Ø1.65mm

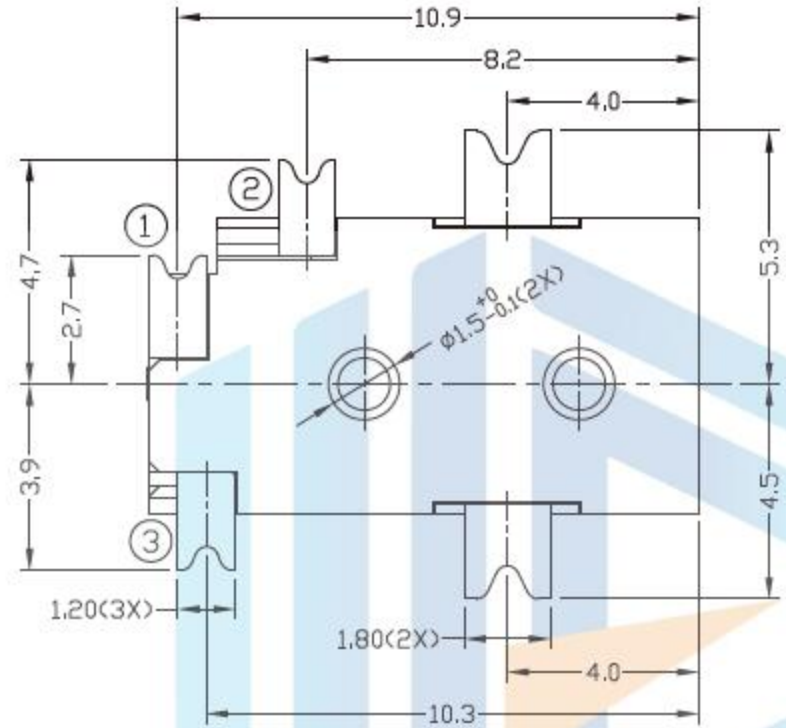

- Specification:
1. Rating : 2.5A/16V DC Max.
 2. Contact resistance: ≤30mΩ
After test: ≤60mΩ
 3. Insulation resistance: ≥100MΩ (DC500V).
After test: ≥50MΩ
 4. Withstanding voltage: 500VAC.
 5. Insertion and extraction force: 0.3~3Kgs.
 6. Life test: 5,000cycles min.
 7. Operation temperature range: -25℃~85℃.

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance	东莞市恒祺电子科技有限公司	
审核:	Arvin:	X.X ±	X.X ±0.30		
校对:	Ru yi:	X.XX ±	X.XX ±0.20	名称: DC插座	型号: DC-098
比例:	视角关系:	X.XXX ±	X.XXX ±0.10	料号:	
版次:	图框大小: A4	Angle ±	Angle ±5°	共 张 , 第 张	备注: