



RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05mm  
(BOTTOM VIEW)

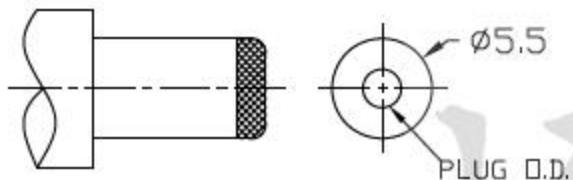

DC MATE PLUG



Model No.	H	I	J
CENTER PIN	φ2.0	φ2.35	φ2.5
PLUG O.D.	φ2.05 <sup>+0.10</sup> / <sub>-0.00</sub>	φ2.40 <sup>+0.10</sup> / <sub>-0.00</sub>	φ2.55 <sup>+0.10</sup> / <sub>-0.00</sub>

技术要求

- 使用条件: -40 ~ 55℃
- 额定负荷: DC 30V 0.5A
- 接触电阻: < 0.03Ω
- 绝缘电阻: > 100MΩ DC250V
- 耐压: AC 500V (50Hz) /min
- 插拔力: 3 ~ 20N
- 机械寿命: 5000次

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance
审核:	Arvin:	X.X ±	X.X ±0.30
校对:	Ru yi:	X.XX ±	X.XX ±0.20
比例:	视角关系:	X.XXX ±	X.XXX ±0.10
版次:	图框大小: A4	Angle ±	Angle ±5°

东莞市恒祺电子科技有限公司

名称: DC插座      型号: DC-005D  
料号:  
共 张 , 第 张      备注: